




DD-SL SLEEVES

DD-SL connections are designed to connect sections of corrugated sheath by means of a thread which is provided every 500 mm.

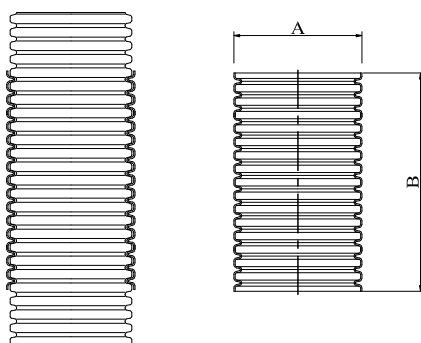


Type	A (mm)	B (mm)	Thickness (mm)	Weight Kg/pc.	Corrugated sheath type
DD7500SL	79 ±2	180 ±5	≥ 1.0 -0.2+0.2	0.100	D-75IT - D-75IT
DD9000SL	94 ±2	180 ±5	≥ 1.0 -0.2+0.2	0.070	D-90IT - D-90IT
DD1100SL	114 ±2	180 ±5	≥ 1.0 -0.2+0.2	0.075	D-110IT - D-110IT

DD-RC CONNECTIONS



DD-RC connections are made for corrugated sheaths. They allow to connect sheaths by adapting different diameters and with enlargements and narrowings. They can be screwed on corrugated sheaths with the following diameter: 75 mm, 90 mm and 110 mm, they are provided on their length with a 100 mm thread every 500 mm.

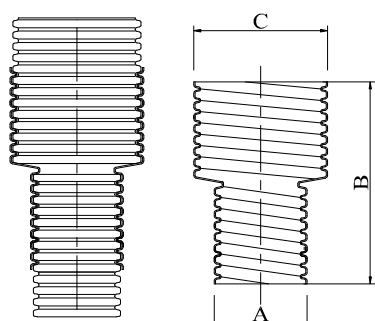

Type	A (mm)	B (mm)	C (mm)	Thickness (mm)	Weight Kg/pc.	Corrugated sheath type
DD9075RC	79 ±2	170 ±5	94 ±2	≥ 1.0 ±0.2	0.090	D-90IT - D-75IT
DD11075RC	79 ±2	170 ±5	114 ±2	≥ 1.0 ±0.2	0.090	D-110IT - D-75IT
DD11090RC	94 ±2	170 ±5	114 ±2	≥ 1.0 ±0.2	0.075	D-110IT - D-90IT