





BONDED "G" CONNECTION

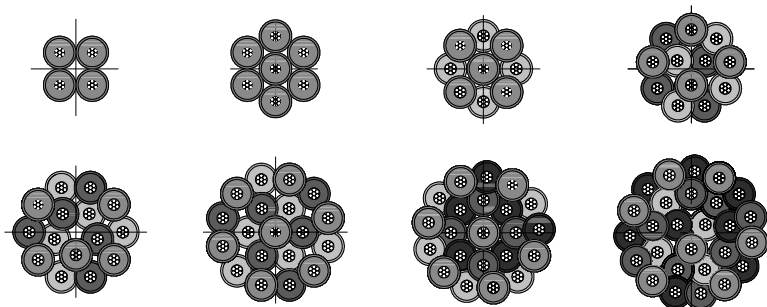

Joints "G" series are designed to allow members of splicing cables during the construction of bridges in progress, casting and shooting joints of cables. The pair made their sleeves monotrefolo with internal pre-loaded terminals with spring-loaded device.

The device is made of multiple layers of offsetting the sleeves to contain the same cable size containable in a tube in a spiral metal sheath with injection /vent.

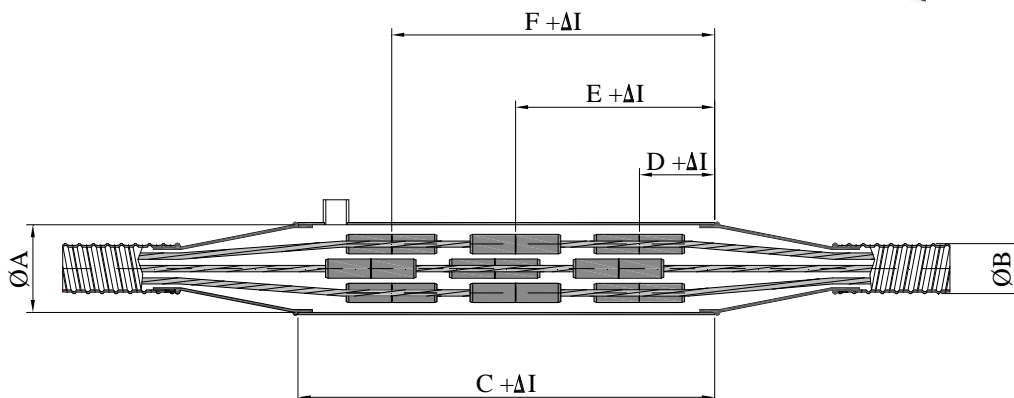

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
4G15	140	45/50	675	300	-	-
7G15	159	62/67	800	340	-	-
9G15	177	72/77	950	400	800	-
12G15	193	80/85	1250	400	800	1.200
15G15	193	85/90	1250	400	800	1.200
19G15	193	95/100	1300	400	800	1.400
22G15	219	100/105	1385	400	800	1.500
27G15	244	110/115	1700	400	800	1.600