





ENCAPSULATED UNBONDED "GX" CONNECTION

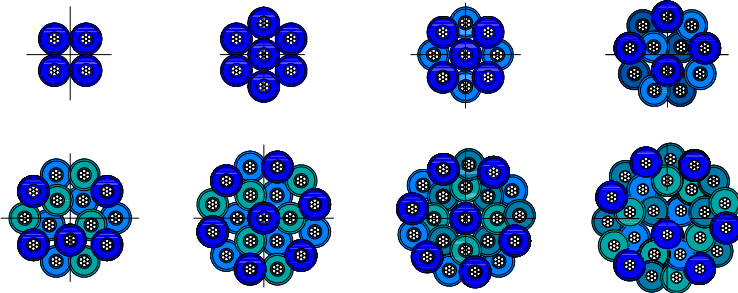

Joints "G" series were created encapsulated in the "GX" solution designed to allow single or multi stranded cables spliced in the non-adherent, while building bridges in progress, casting and shooting joints of cables. The coupling is achieved with linear monotrefolo encapsulated, with their internal pre-loaded terminals with spring-loaded device, the whole is encapsulated in polyethylene is fat.

The device is made of multiple layers of offsetting the sleeves so as to contain the same information contained in a cable size and compatible with the application. The fuel injection system does not require the application being non-adherent, he is cast in the cast assembled.

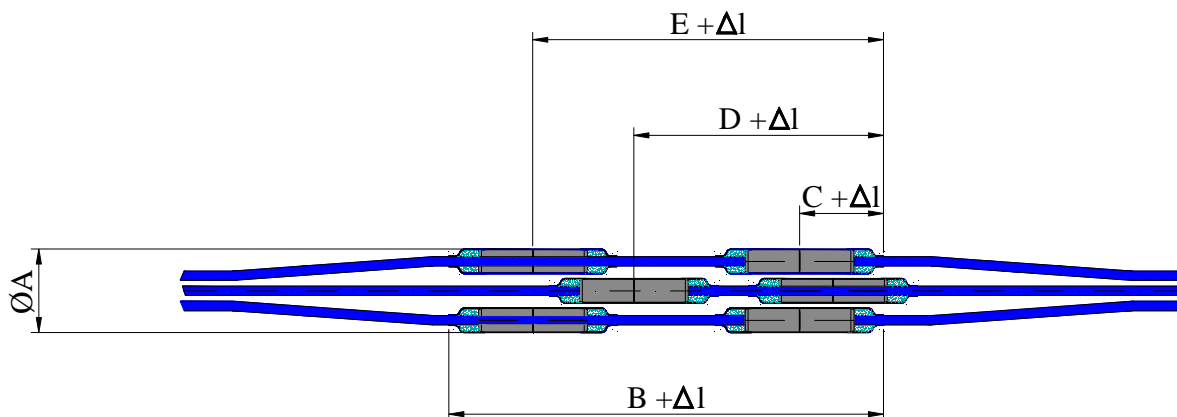

Type	A	B	C	D	E
	(mm)	(mm)	(mm)	(mm)	(mm)
4GX15	140	675	300	-	-
7GX15	159	800	340	-	-
9GX15	177	950	400	800	-
12GX15	193	1250	400	800	1.200
15GX15	193	1250	400	800	1.200
19GX15	193	1300	400	800	1.400
22GX15	219	1385	400	800	1.500
27GX15	244	1700	400	800	1.600